

Clad Alignment Fusion Splicer

45S



The Essential Splicer

Faster operation
User-friendly design
Consistent quality

 **Fujikura**


Faster operation

■ Simultaneous fiber preparation

Fiber preparation, stripping, cleaving, and setting in the splicer usually needs repeating separately for both left and right-side fibers. The 45S process does away with that and enables simultaneous fiber preparation thanks to the new SS05 double fiber stripper, the new AD-16A fiber adapter for the CT50 cleaver and the clever set plate mechanism of the 45S itself.

● Simultaneous fiber stripping

The SS05 fiber stripper is equipped with four blades: ① for 2mm/3mm, ② for 900μm, ③④ for 250μm fibers. Using blades ③ & ④ allows simultaneous stripping of 250μm fibers.

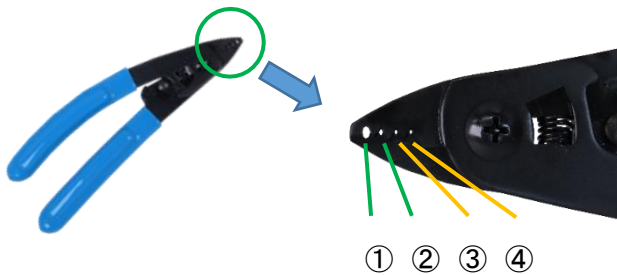


Fiber Stripper SS05



● Simultaneous fiber cleaving

The new AD-16A fiber adapter for the CT50 cleaver is equipped with two grooves. Placing one fiber in each groove provides simultaneous cleaving.

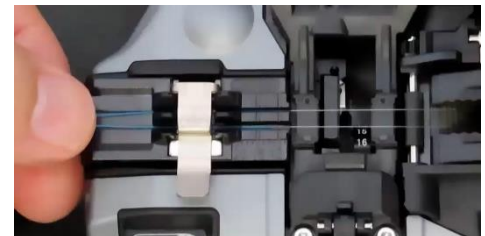

Optical Fiber Cleaver CT50

● Simultaneous fiber setting


Previous fusion splicers required two-handed operation to close fiber clamp and hold the fiber. Thanks to a new clamp mechanism, the 45S close with fiber setting and provides one-handed fiber setting and simultaneous fiber setting.



Two-handed



One-handed

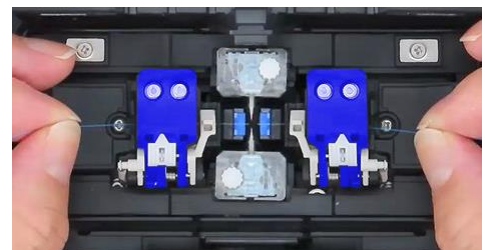

Simultaneously fiber setting

Refer to the movie




Faster operation

■ Faster fiber transportation time

The 45S is equipped with a mechanism linking the wind protector and fiber clamp so when you open wind protector, the fiber clamps opens automatically.

The 45S is also equipped with retention clamps which are reputed by our conventional fusion splicer models. The retention clamps prevent the fiber from jumping out after the fiber clamps are opened. These mechanisms work in tandem to provide easy fiber handling and a reduction in the time it takes to transfer the fiber to the heater.

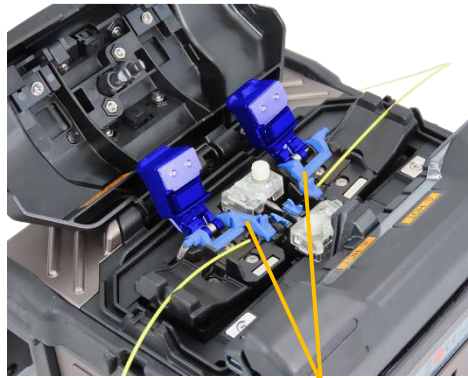

Fiber retention clamps

Refer to the movie



■ Faster heating time


The heater for shrinking the reinforcing sleeve is designed to heat the reinforcing sleeve between two heaters in the front and rear. It shorten 15% of the heating time in case of using FP-03 sleeve.



※Measured at room temperature with the AC adapter. The heat time is defined from the start beep sound to the finish beep sound. The average heat time changes depending on the environmental conditions, sleeve type and battery pack condition. In addition, since the heating operation is constantly optimized, the average heating time changes depending on the usage conditions of the fusion splicer.

■ 30% faster than previous model

Thanks to the way the 45S streamlines the preparation process, reduces transport time and delivers faster heating, it is 30% faster than the 41S+ it replaces.

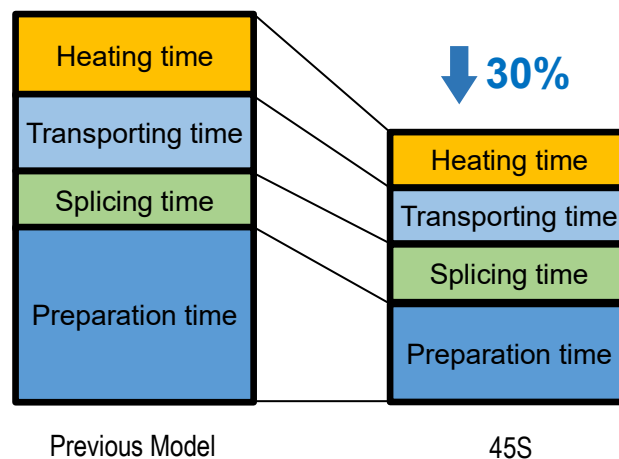


User-friendly design

■ Movable LCD monitor

The 45S is equipped with a movable 4.95-inch color LCD monitor to ensure optimum visibility in a range of conditions, even when outside under direct sunlight.



■ Easy sleeve positioning

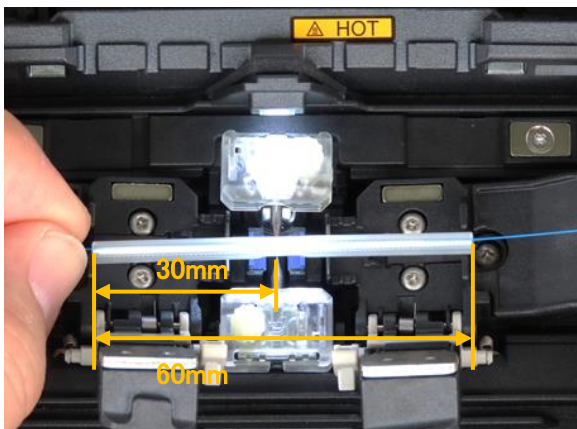

The space between the edges of the left and right fiber clamp edges is 60mm, as per the image to the left. This distance allows for easy sleeve positioning, with the splice point positioned in the middle of the sleeve. The scale on the heater shows the guide for other sleeve lengths, for example 40mm.


■ Removable battery

The removable battery makes replacement easy and convenient.



■ Smaller footprint

The cube shape provides a reduced base area while also giving the user a large operating space.

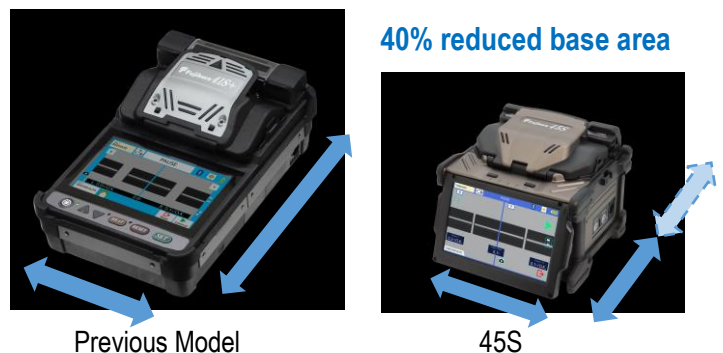

User-friendly design

■ Carrying case with work tray

The configurable 45S carrying case provides various usage configurations.



Configuration example 1
Open the carry case and start operation.




Configuration example 2
Remove the work tray and put on top of the carry case.

Removing the work tray from the carry case allows the tray to expand. Using the work tray with the strap provides a portable work surface and the strap can be fixed to the work tray at the sides of the splicer to secure the usability.



Secure working space

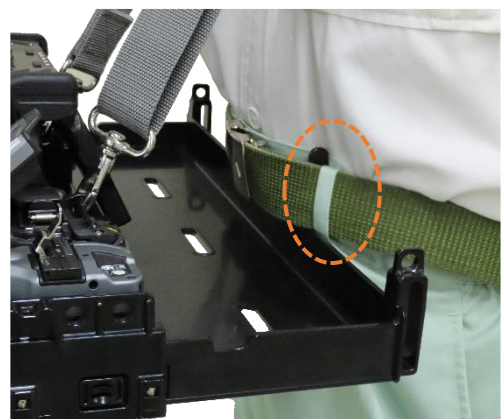


Increased security when used with a belt

Consistent quality

■Active Fusion Control



The 45S is equipped with Fujikura Active Fusion Control Technology, which analyses the fiber image during fusion and controls the arc discharge accordingly. The result is stable splice loss irrespective of the environment.



ACTIVE FUSION
CONTROL TECHNOLOGY

●Control by fiber cleaved surface

A bad cleave end face is a potential reason for high splice loss. The 45S can address this because it's equipped to control fusion according to the condition of the cleaved surface. This function helps reduce splice loss by compensating for poor cleaves.

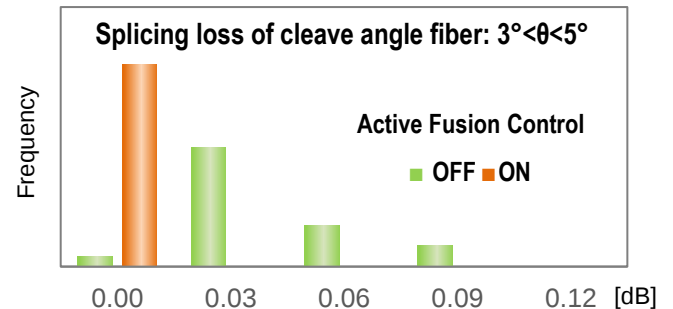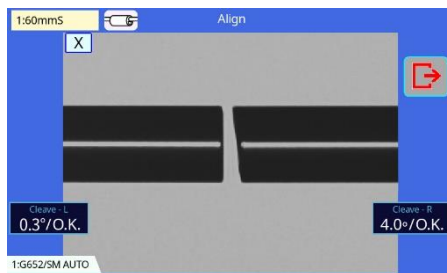


※Fujikura test result of ITU-T G652 fibers measured by cut-back method.

The splice loss may vary depending on operating environment or fiber characteristics.

●Real-time fusion control

The 45S analyses the fiber image during fusion and controls fusion power according to the real-time condition of the fiber. This helps to minimize splice loss irrespective of the environment.

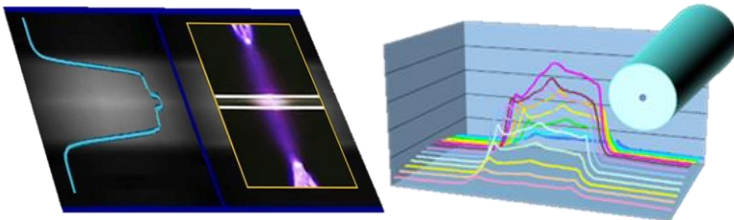

Analyzing fiber image during fusion

This process also provides Warm Splice Image (WSI) technology. WSI analyses during the splice and provides loss estimation, even though the 45S is a clad alignment splicer.

It would help to prevent the case of “good loss estimation but bad actual loss”.


■Active Blade Management

The 45S monitors the blade condition of the CT50 cleaver via wireless communication.

When the 45S judges that the blade is worn, it will command the CT50 to rotate the blade to a new position to ensure the CT50 keeps delivering consistent cleaving performance.



ACTIVE BLADE
MANAGEMENT TECHNOLOGY

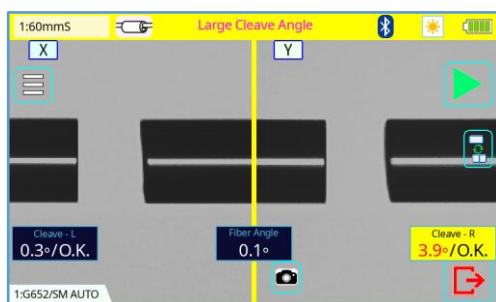

Additional features

■ Splice+ app

The Splice+ app provides convenient splicer management by wireless communications, between the 45S and mobile phone.


● Smart lock

A break in the pairing of wireless communication between the splicer and mobile phone can lock the splicer which prevents misuse and works as an anti-theft measure.



● Data management

The data management function retrieves data from the splicer and saves it to the cloud. This data can include the GPS data of a phone, which is useful for splicer operation management.

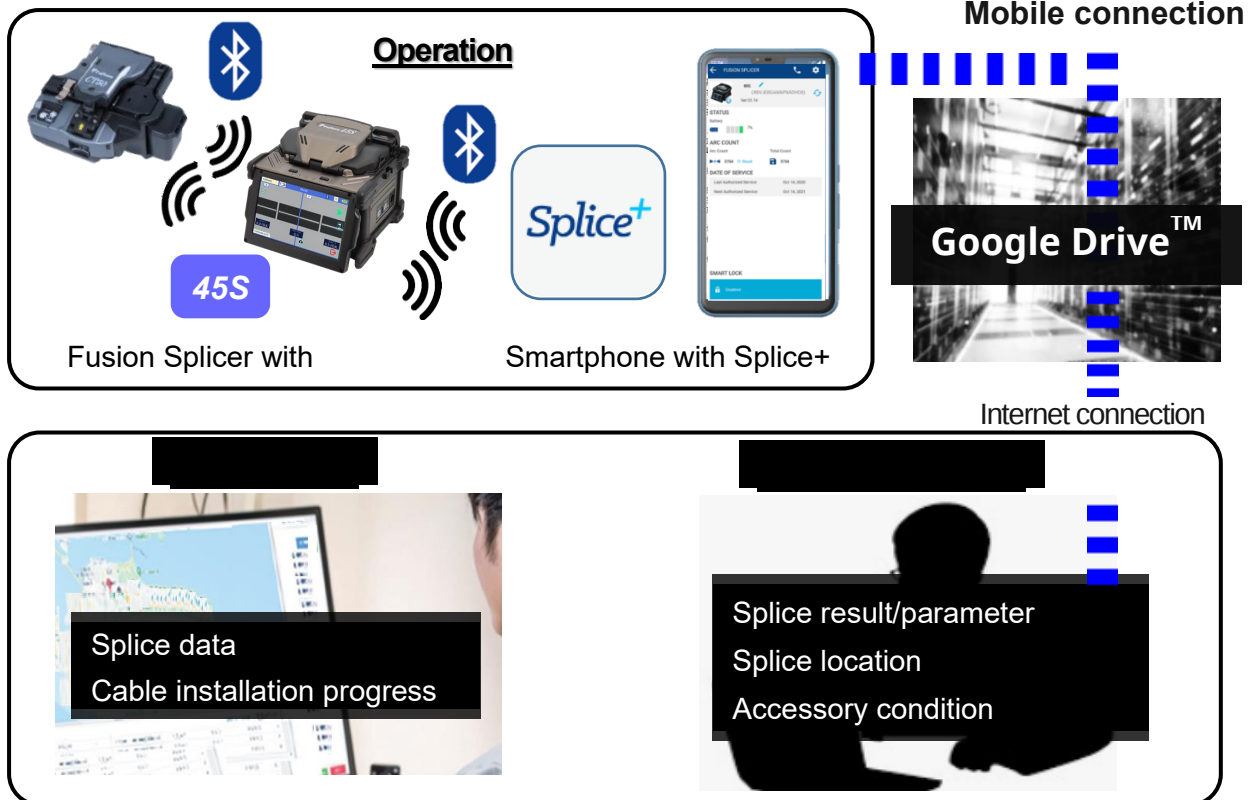

You can find and obtain Splice+ App from Google Play and App Store.



Note: Bluetooth® mark and logos are the registered trademarks of Bluetooth SIG, Inc.
Google Drive is trademarks of Google LLC.



Specifications/Items

45S Standard Items

Item	Model	Qty
Clad Alignment Fusion Splicer	45S	1 pc
(1) Battery Pack *	BTR-17	1 pc
(2) AC Adapter	ADC-21	1 pc
(3) AC Power Cord	ACC-08, 09, 10, 11 or 12	1 pc
(4) USB Cable	USB-01	1 pc
(5) Electrodes, for spare	ELCT2-16B	1 pair
(6) Carrying Case	CC-45	1 pc
(7) Work Tray	WT-10	1 pc
(8) Tripod Screw	TS-03	1 pc
(9) Carrying Case Strap	ST-04	1 pc
(10) Alcohol Dispenser	AP-02	1 pc
(11) Quick Reference Guide	QRG-08-E, C or J	1 pc
Single Fiber Stripper	SS05	1 pc
Optical Fiber Cleaver	CT60	1 pc
(1) Fiber Scrap Collector	FDB-05	1 pc
(2) Fiber Setting Plate	AD-16A	1 pc
(3) Case, for cleaver	CC-37	1 pc
(4) Hexagonal Wrench	HEX-01	1 pc



* Please follow IATA regulation when shipping the battery by air

45S 	(1) 	(2) 	(3) 	(4) 
(5) 	(6) 	(7) 	(8) 	(9) 
(10) 	(11) 	SS05 		
CT60 	(1) 	(2) 	(3) 	(4) 

Specifications/Items

45S Specifications

Item		Specification
Fiber alignment method		Active clad alignment
Fiber count can be spliced		Single fiber
Applicable fiber	Fiber type	Single mode optical fiber
	Cladding dia.	Multi mode optical fiber
Applicable coating	Sheath clamp	Approx. 125μm
		Coating dia. : Max. 3000μm
Fiber splice performance	Splice loss *2	Cleave length : 5 to 16mm *1
		ITU-T G.652 : Avg. 0.03dB
		ITU-T G.651 : Avg. 0.01dB
		ITU-T G.653 : Avg. 0.05dB
		ITU-T G.655 : Avg. 0.05dB
		ITU-T G.657 : Avg. 0.03dB
Applicable Protection sleeve	Splice time *3	SM FAST mode : Avg. 6 to 8sec.
	Sleeve type	Heat shrinkable sleeve
	Sleeve length	Max. 66mm
Sleeve heat performance	Sleeve dia.	Max. 6.0mm before shrinking
	Heat time *4	60mm mode : Avg. 21 to 23sec.
Fiber tensile test force		60mm slim mode : Avg. 16 to 18sec.
Electrode life *5		Approx. 2.0N
Physical description	Approx. 6,000 splices	
	Dimensions W	Approx. 131mm without projection
	Dimensions D	Approx. 123mm without projection
	Dimensions H	Approx. 121mm without projection
Environmental condition	Weight	Approx. 1.4kg including battery
	Temperature	Operate: -10 to 50 °C
	Humidity	Storage: -40 to 80 °C
	Altitude	Operate: 0 to 95%RH non-condensing
AC adaptor	Input	Storage: 0 to 95%RH non-condensing
	Type	Max. 5000m
Battery pack	Output	AC100 to 240V, 50/60Hz, Max. 1A
	Capacity *6	Rechargeable Lithium Ion
	Temperature	Approx. DC14.4V, 3190mAh
	Battery life *7	60mm mode:
		Approx. 200 splice and heat cycles
		60mm slim mode :
Display	LCD monitor	Approx. 230 splice and heat cycles
	Magnification	Recharge: 0 to 40 °C
Illumination	V-grooves	Long Term Storage : -20 to 30 °C
	PC	Approx. 500 recharge cycles
Interface	External LED lamp	TFT 4.95 inches with touch screen
	Wireless *8	Approx. 132 to 300x
	Splice mode	LED lamp
Data storage	Heat mode	USB2.0 Mini B type
	Splice result	USB2.0 A type
	Splice image	Approx. DC5V, 500mA
		Bluetooth 5.2
Screw hole for tripod		100 splice modes
Other features	Automatic functions	30 heat modes
	Reference guide	20,000 splices
	Sheath clamp	100 images
	Electrode	Open with/without Wind Protector
		Close with fiber setting



Notes

- *1 Cleave length range depending on fiber type
5 to 16mm : 125μm cladding dia. and 250μm coating dia.
10 to 16mm : 125μm cladding dia. and 400 or 900μm coating dia.
- *2 Measured with a cut-back method relevant to ITU-T and IEC standard after splicing Fujikura identical fibers. The average splice loss changes depending on the environmental condition and fiber characteristics.
- *3 Measured at room temperature. The definition of splice time is from the fiber image appeared in LCD monitor to the estimated loss displayed. The average splice time changes depending on the environmental conditions, fiber type, and fiber characteristics.
- *4 Measured at room temperature with the AC adaptor. The heat time is defined from the start beep sound to the finish beep sound. The average heat time changes depending on the environmental conditions, sleeve type and battery pack condition. In addition, since the heating operation is constantly optimized, the average heating time changes depending on the usage conditions of the fusion splicer.
- *5 The electrode life changes depending on the environmental conditions, fiber type and splice modes.
- *6 Test condition
(1) Splice and heat time: 1 minute cycle
(2) Using the splicer power save settings, subject to our testing condition.
(3) Using a not degraded battery
(4) At room temperature
The battery capacity changes when testing with a different conditions from the above.
- *7 The battery capacity decreases to a half after approx. 500 discharge and recharge cycles. The battery life is shortened further when using outside of the storage temperature range, operating temperature range, if completely discharged by storing for a long time without recharging.
- *8 Bluetooth® mark and logos are the registered trademarks of Bluetooth SIG, Inc.

45S Options

Item	Model	Remarks
Fiber Holder	FH-70-200	200μm coating diameter
	FH-70-250	250μm coating diameter
	FH-70-900	900μm coating diameter
	FH-FC-20	900μm in 2mm diameter cable
	FH-FC-30	900μm in 3mm diameter cable
Sheath Clamp	CLAMP-S35B	900μm loose buffer cable
Fiber holder set plate	SP-04	Fiber holder set base
Transfer Clamp	CLAMP-DC-12	Transferring drop cable on work tray
Protection sleeve	FP-03	60mm, Max. 900μm coating diameter
	FP-03(L=40)	40mm, Max. 900μm coating diameter
	FP-03M	FP-03 with magnetic material